



Designed by Olesen, Mortimer and Bradley

Updated by D. A. Voss Later updated by JM Juett

NMRA Recommended Practice	
Wheel Contour	
Aug 27, 2026	RP-25 Draft

1 General

This wheel contour is specified for optimum track holding ability and most prototypical appearance within the Interchange limits of NMRA standards S 4.2

1.1 Introduction and Intended Use (Informative)

- 5 Wheels of this contour will perform at their best on track conforming to the limits of NMRA STANDARD S-3.2 and consistent with RP-10, RP-11 and R-12.

1.2 References

This standard should be interpreted in the context of the following NMRA Standards, Technical Notes, and Technical Information.

10 1.2.1 Normative

- S-4.2 Wheels Standard Scales

1.2.2 Informative

- 15
 - S-3.2 Track Standard Scales
 - RP-10 Trackwork General
 - RP-11 Curvature and Rolling Stock
 - RP-12 Turnouts General

1.3 Terminology

Term	Definition
N	Wheel Width
T	Wheel flange width (thickness).
W	Wheel tread width (N-T)
D	Wheel flange depth
P	Gauging point. is the point of tangency between R1 and R2 and the point of crossing of R2 with the inside of the wheel. It is the point where the wheel makes contact with the head of the rail.
R1	Filet radius between the wheel flange and wheel tread.
R2	Inner radius, inside radius of wheel flange.
R3	Outer radius, outside radius of wheel flange.
Ogive	A pointed, smoothly tapered curve used in architecture, ballistics, and aerospace engineering. The shape of R2 & R3 at the point of the wheel flange.

20

Table of Contents

1

General1

1.1

Introduction and Intended Use (Informative)1

1.2

References1

1.2.1

Normative.....1

25

1.2.2

Informative1

1.3

Terminology1

2

Content Section23

2.1

Cross Section of Wheel23

2.2

Wheel Dimensions.....34

30

3

Document History4

2

Content Section


The dimensions of this RP were specified to give improved performance and track holding ability, reducing derailments. The general shape defined in RP-25 mimics that of the prototype, however

35

dimensions are proportionally much greater than the prototype. For prototype dimensions refer to S-4.1 Wheels Fine Scale & Proto.

2.1

Cross Section of Wheel

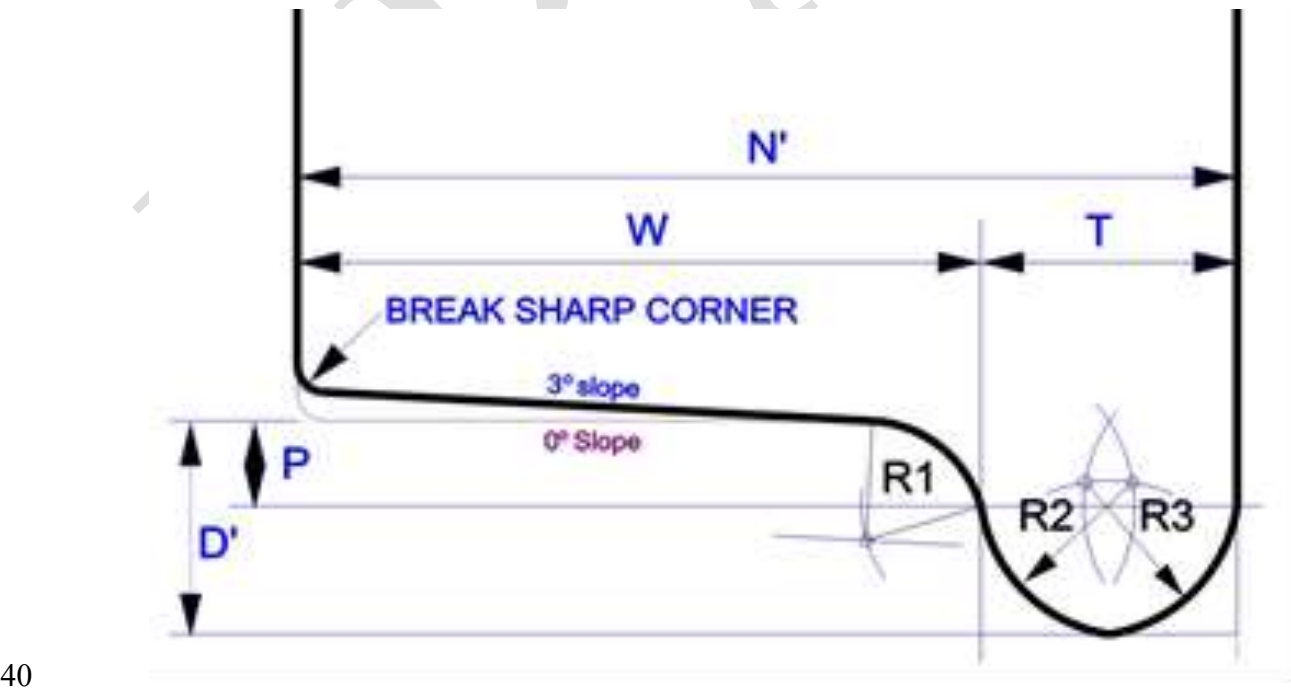

2.2 Wheel Dimensions

Imperial inch (metric mm)

WHEEL CODE	TIRE WIDTH N' nominal	FLANGE WIDTH T maximum	TREAD WIDTH W nominal	FLANGE DEPTH D' nominal	GAGING POINT P	FILLET RADIUS R1	INNER RADIUS R2	OUTER RADIUS R3
175	.175(4.45)	.048(1.22)	.127(3.23)	.045(1.14)	.015(.38)	.025(.64)	.028(.71)	.028(.71)
145	.145(3.68)	.039(.99)	.106(2.69)	.036(.91)	.013(.33)	.021(.53)	.023(.58)	.023(.58)
126	.126(3.20)	.036(.91)	.090(2.29)	.028(.71)	.012(.30)	.018(.46)	.021(.53)	.021(.53)
116	.116(2.59)	.031(.79)	.085(2.16)	.026(.66)	.011(.28)	.014(.36)	.018(.46)	.018(.46)
110	.110(2.79)	.030(.76)	.080(2.03)	.025(.64)	.010(.25)	.014(.36)	.018(.46)	.018(.46)
93	.093(2.36)	.026(.66)	.067(1.70)	.020(.51)	.009(.23)	.009012(.30)	.017(.43)	.017(.43)
88	.088(2.24)	.025(.64)	.063(1.60)	.023021(.51)	.009(.23)	.012(.30)	.015(.38)	.015(.38)
79	.079(2.01)	.023020(.51)	.056(1.42)	.020(.51)	.008(.20)	.011(.28)	.014(.36)	.014(.36)
72	.072(1.83)	.020(.51)	.052(1.32)	.020(.51)	.008(.20)	.010(.25)	.012(.30)	.012(.30)
54	.054(1.37)	.014(.36)	.040(1.02)	.016(.41)	.007(.18)	.008(.20)	.009(.23)	.009(.23)

NOTES:

- Wheels listed above provide a selection meeting the interchange requirements of Standard S-4.2 Wheels Standard Scales.
- N' and D' are Nominal design dimensions providing reasonable tolerance within the limits specified by N and D of standards S-4.2 Wheels Standard Scales.
- T and W are measured at the Gaging Point P which is the point of tangency between R1 and R2 and the point of crossing of R2 with the inside of the wheel.
- Radii at the edge of the flange should be as large as possible within prescribed limits to reduce side friction against the railhead to protect Frog Points by decreasing effective Wheel Check Gauge and to guide the flange through Flangeways and past other obstructions.
- Tread Taper is not required, but 1 degree and 3 degree mold release draft is allowed. Note that new prototype wheels include a taper in anticipation of wear. Worn wheels show a reverse taper. A taper will also help center the wheels on the track. A wheel taper acts as a differential when negotiating curves.
- Accurate measurements of P, R1, R2 & R3 require expensive equipment such as an optical comparator. The NMRA developed an RP-25 Gauge that gives a close approximation for all dimensions on code 145, 110, 88 and 72 wheels.
- LS (Large Scale) wheels (code 256) follow G1MRA profile and are not presently covered under RP-25.

3 Document History

Date	Description
Mar 1997	First Release Olesen, Mortimer and Bradley
Jly 2009	Redrew diagram and updated format of document. Revised by DA Voss
Aug 27 2026	Migrated to new template, additional information added, clarified dimensions to agree with S-4.2 Wheels Standard Scales. <u>Added metric dimensions.</u> JM Juett

Important Notices and Disclaimers Concerning NMRA Standards Documents

The Standards (S), Recommended Practices (RP), Technical Note (TN), and Technical Information (TI) documents of the National Model Railroad Association ("NMRA Standards documents") are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading "Important Notices and Disclaimers Concerning NMRA Standards Documents."

Notice and Disclaimer of Liability Concerning the Use of NMRA Standards Documents

NMRA Standards documents are developed within the Standards and Conformance Department of the NMRA in association with certain Working Groups, members, and representatives of manufacturers and sellers. NMRA develops its standards through a consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. NMRA Standards documents are developed by volunteers with modeling, railroading, engineering, and industry-based expertise. Volunteers are not necessarily members of NMRA, and participate without compensation from NMRA.

NMRA does not warrant or represent the accuracy or completeness of the material contained in NMRA Standards documents, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard or recommended practice, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, NMRA disclaims any and all conditions relating to results and workmanlike effort. In addition, NMRA does not warrant or represent that the use of the material contained in NMRA Standards documents is free from patent infringement. NMRA Standards documents are supplied "AS IS" and "WITH ALL FAULTS."

Use of NMRA Standards documents is wholly voluntary. The existence of an NMRA Standard or Recommended Practice does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the NMRA Standards documents. Furthermore, the viewpoint expressed at the time that NMRA approves or issues a Standard or Recommended Practice is subject to change brought about through developments in the state of the art and comments received from users of NMRA Standards documents.

In publishing and making its standards available, NMRA is not suggesting or rendering professional or other services for, or on behalf of, any person or entity, nor is NMRA undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any NMRA Standards document, should rely upon their own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given NMRA Standards document.

IN NO EVENT SHALL NMRA BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: THE NEED TO PROCURE SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD OR RECOMMENDED PRACTICE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

NMRA's development of NMRA Standards documents involves the review of documents in English only. In the event that an NMRA Standards document is translated, only the English version published by NMRA is the approved NMRA Standards document.

Official Statements

A statement, written or oral, that is not processed in accordance with NMRA policies for distribution of NMRA communications, or approved by the Board of Directors, an officer or committee chairperson, shall not be considered or inferred to be the official position of NMRA or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of NMRA.

Comments on Standards

Comments for revision of NMRA Standards documents are welcome from any interested party, regardless of membership. However, **NMRA does not provide interpretations, consulting information, or advice pertaining to NMRA Standards documents.**

Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since NMRA standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, NMRA, its departments, Working Groups or committees cannot provide an instant response to comments, or questions except in those cases where the matter has previously been addressed. For the same reason, NMRA does not respond to interpretation requests. Any person who would like to participate in evaluating comments or in revisions to NMRA Standards documents may request participation in the relevant NMRA working group.

Laws & Regulations

Users of NMRA Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any NMRA Standards document does not constitute compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. NMRA does not, by the publication of NMRA Standards documents, intend to urge action that is not in compliance with applicable laws, and NMRA Standards documents may not be construed as doing so.

Copyrights

NMRA Standards documents are copyrighted by NMRA under US and international copyright laws. They are made available by NMRA and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of modeling, structural and engineering practices and methods. By making NMRA Standards documents available for use and adoption by public authorities and private users, NMRA does not waive any rights in copyright to the NMRA Standards documents.

IMPORTANT NOTICE

NMRA Standards documents do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other systems, devices or networks. NMRA Standards documents development activities consider research and information presented to the standards development group in developing any safety recommendations. Other information about safety practices, changes in technology or technology implementation, or impact by peripheral systems also may be pertinent to safety considerations during implementation of the standard. Implementers and users of NMRA Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.